



The GSH-S is a **compact** and **robust draw wire sensor** designed for **linear position measurement** in mobile machines.

Its optimized mechanical design allows **easy integration** even in space-constrained installations.

Based on **non-contact Hall-effect technology**, it ensures **stable measurement** performance, **high repeatability** and **long-term reliability** without wear of the sensing element.

With measurement **ranges up to 8300 mm**, it is suitable for applications such as stabilizers, telescopic booms, lifting systems and articulated machine structures.

The sensor is engineered to withstand **harsh operating conditions**, including **shock**, **vibration** and **demanding EMC** environments typical of **off-highway equipment**.

Multiple output options are available, including **voltage**, **current**, **ratiometric** and **CANopen / CANopen Safety** interfaces, enabling **flexible system integration**.

PLd/SIL2 certified variants are available, designed according to Category 2 and HFT = 0 (Category 3 and HFT = 1 for electronic subsystem) in compliance with **EN ISO 13849-1** and **EN IEC 62061** (See information for use for further details).

Detailed installation instructions, safety related informations and CAN communications details are provided in the detailed user documentation.

TECHNICAL SPECIFICATIONS

Measurement range (FS)

1800 mm, 2300 mm, 3300 mm, 4300 mm, 4800 mm, 5300 mm, 6300 mm, 7300 mm, 8000 mm, 8300 mm

Supply voltage (Us)

8...32 V DC (overvoltage 36 V DC continuous);
4.5...5.5 V DC (for ratiometric output only); 13...32 V DC (for 0...10 V output only)

Supply current

< 50 mA (excluding output current / terminated CAN-bus line)

Reverse polarity protection

Yes

Short circuit protection

Yes

Output signal

Ratiometric output: 10...90 % Us; Analog output (voltage): 0.5...4.5 V; 0...10 V; Analog output (current): 4...20 mA; Digital output: CANopen; CANopen Safety

Load conditions

Voltage output: Min. 10 k Ω ; Current output: Max. 200 Ω for supply voltage < 15 V DC;
Max. 500 Ω for supply voltage > 15 V DC
Digital output: internal 120 Ω terminating resistor not included

Power-on start-up time

< 1 s

Response time

Analog output: Typ. 2 ms; Digital output: Typ. 200 ms

Electrical connections

M12 connector; Electrical cable

Resolution

Analog output: 12 bit; Digital output: 14 bit

Linearity factory verification@ 25 °C

< ± 0.5 % FS

Repeatability

Typ. ± 0.15 % FS (for strokes 1800...6300 mm)
Typ. ± 0.5 % FS (for strokes 7300...8300 mm)

Accuracy

Typ. ± 1.1 % FS (-40...+85 °C)

Working temperature

-40...+85 °C

Sinusoidal vibrations

20 g, 10–2000 Hz, 3 axes (IEC 60068-2-6)

Mechanical shock

50 g, 11 ms, 3 axes (IEC 60068-2-27)

Electromagnetic compatibility

2014/30/EU Electromagnetic Compatibility (EMC); Reference standards:
EN ISO 13766-1:2018; EN ISO 13766-2:2018

Safety

SIL 2 according to EN IEC 62061 and IEC/EN 61508; Performance Level d (PL d) according to EN ISO 13849-1 Category 2

Life cycles

500000 cycles @ $v \leq 1$ m/s, $a \leq 0.5$ g; 250000 cycles @ $v \leq 2$ m/s, $a \leq 1$ g
(v = linear cable velocity; a = linear cable acceleration)

Measuring cable pull-in/out force

> 4 N at start of stroke (retracted); > 8 N at end of stroke (extended)

Measuring cable speed/acceleration

Max. 2 m/s @ 1 g; typ. 1 m/s @ 0.5 g

IP Protection level

IP67 / IP69K (with mating connector)

Material

Housing: PBT; Measuring cable: AISI316 stainless steel, $\varnothing$ 0.85 mm nylon coating

Measuring cable break load

Typ. 300 N

Drum circumference

248 mm

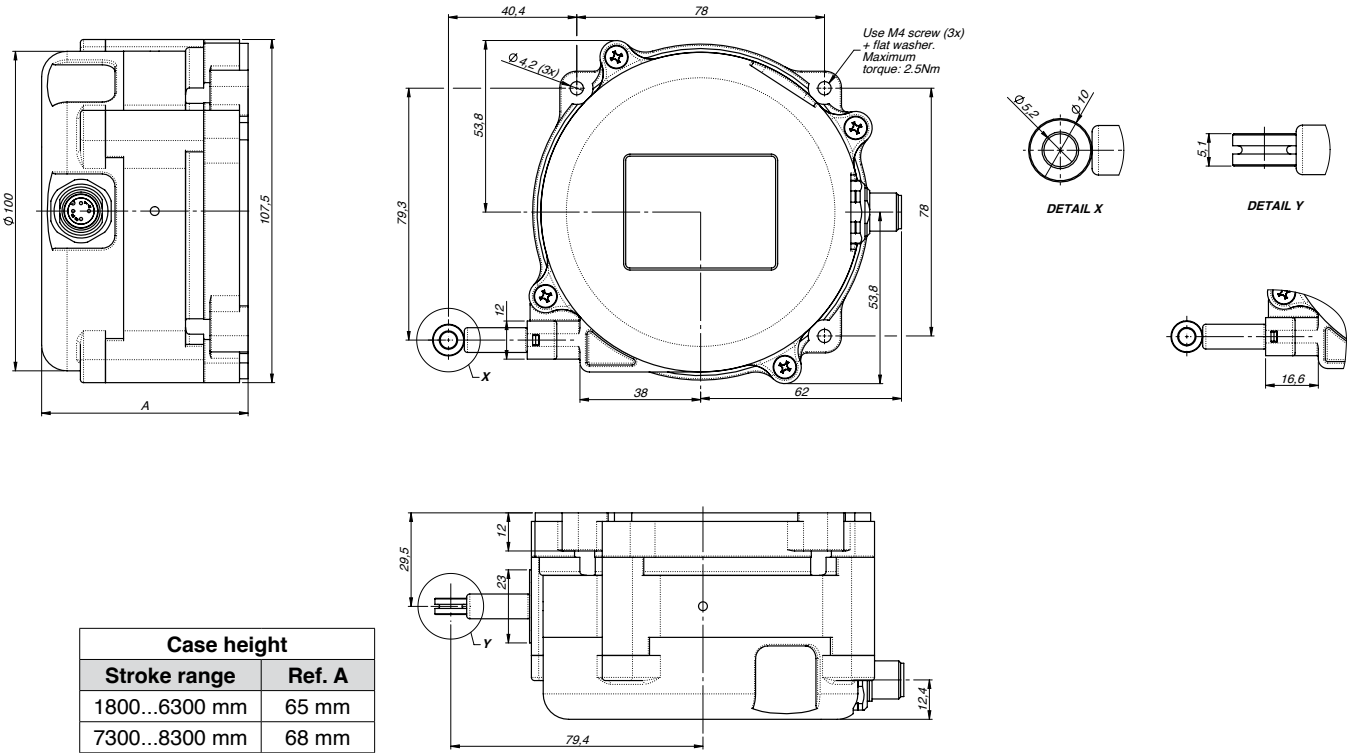
Weight

< 0.8 kg


MECHANICAL DIMENSIONS

All dimensions are in mm. Decimal separator in drawings is comma.

M12 1x Version




Cable Version

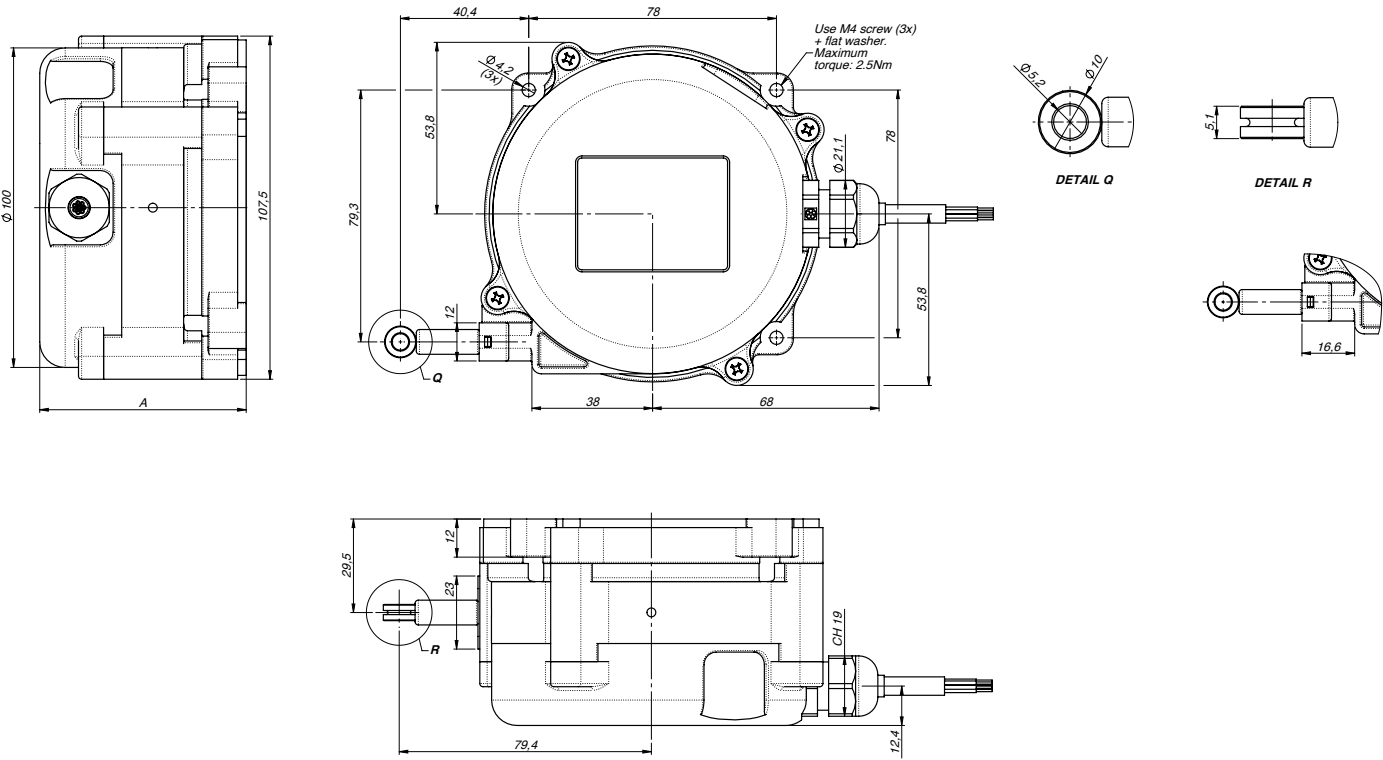


MECHANICAL DIMENSIONS

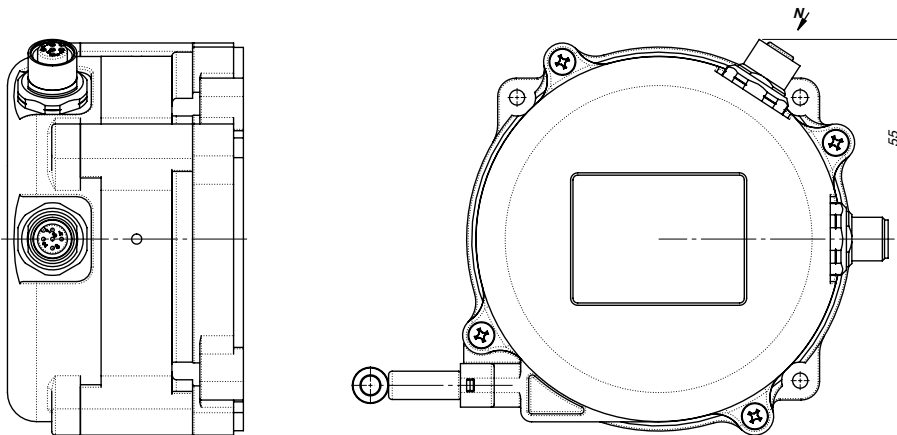IN-OUT - M12 5P VERSION - CANopen









IN-OUT - CABLE VERSION - CANopen

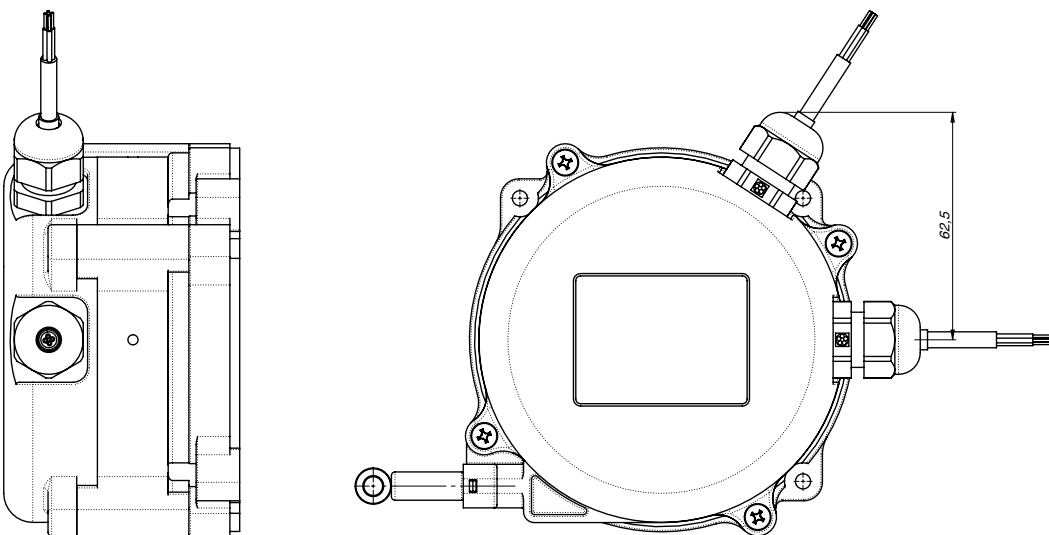


All dimensions are in mm. Decimal separator in drawings is comma.

ELECTRICAL CONNECTIONS - M12 VERSION


1xM12 4 poles connector		M-1	1xM12 8 poles connector		O-1
M12x1 4-pin male connector 		ANALOG OUTPUT CONNECTOR PINOUT 1. V+ 2. 0V 3. OUT CH1 4. OUT CH2		DIGITAL OUTPUT CONNECTOR PINOUT 1. V+ 2. 0V 3. CAN_H 4. CAN_L	
				M12x1 8-pin male connector 	
				ANALOG OUTPUT CONNECTOR PINOUT 1. V+ 2. 0V 3. OUT CH1 4. N.C. 5. V+ 6. 0V 7. OUT CH2 8. N.C.	
IN-OUT with M12 5 poles connector		P-3	1xM12 5 poles connector		P-1
(CAN pin 1 0V)			(CAN pin 1 0V)		
M12x1 5-pin female connector 		DIGITAL OUTPUT CONNECTOR PINOUT 1. 0V 2. V+ 3. 0V 4. CAN_H 5. CAN_L		M12x1 5-pin male connector 	
				DIGITAL OUTPUT CONNECTOR PINOUT 1. 0V 2. V+ 3. 0V 4. CAN_H 5. CAN_L	
VIEW FROM N					
IN-OUT with M12 5 poles connector		N-3	1xM12 5 poles connector		N-1
(CAN pin 1 FLOATING)			(CAN pin 1 FLOATING)		
M12x1 5-pin female connector 		DIGITAL OUTPUT CONNECTOR PINOUT 1. FLOATING 2. V+ 3. 0V 4. CAN_H 5. CAN_L		M12x1 5-pin male connector 	
				DIGITAL OUTPUT CONNECTOR PINOUT 1. N.C. 2. V+ 3. 0V 4. CAN_H 5. CAN_L	
VIEW FROM N					
The male and female M12 connectors are internally wired in pass-through configuration. Corresponding pins, including Pin 1 (floating), are directly connected between connectors.					
PINS MARKED "N.C." MUST NOT BE CONNECTED					

ELECTRICAL CONNECTION - CABLE VERSION

IN-OUT with cable connection F-0 F-3	
IEC 60228 Cable 4 pole 0.34mm2 PUR OD 4.4mm  ANALOG OUTPUT CONNECTIONS RED 1. V+ BLACK 2. 0V BLUE 3. OUT CH1 WHITE 4. OUT CH2 DIGITAL OUTPUT CONNECTOR PINOUT RED 1. V+ BLACK 2. 0V BLUE 3. CAN_H WHITE 4. CAN_L	


ACCESSORIES

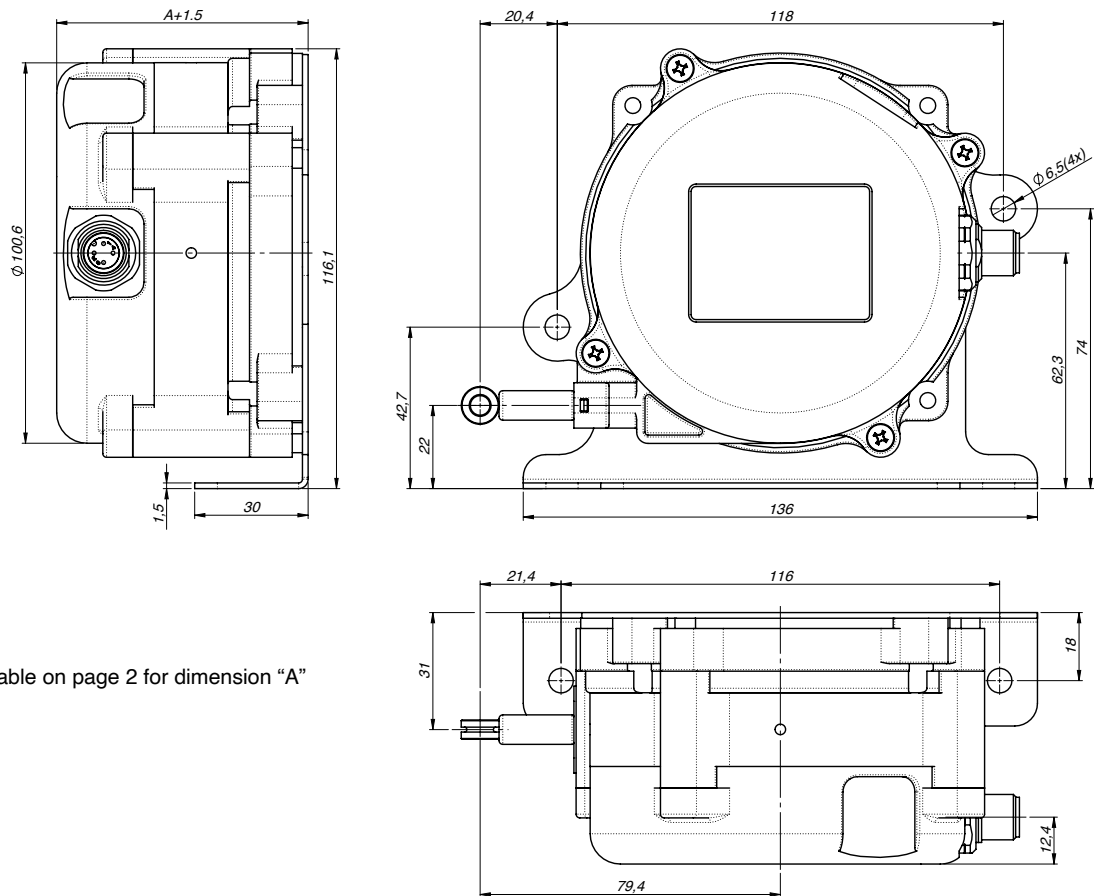FIXING FLANGE MODEL A - FLA033 (optional accessory to order)



“See table on page 2 for dimension “A”

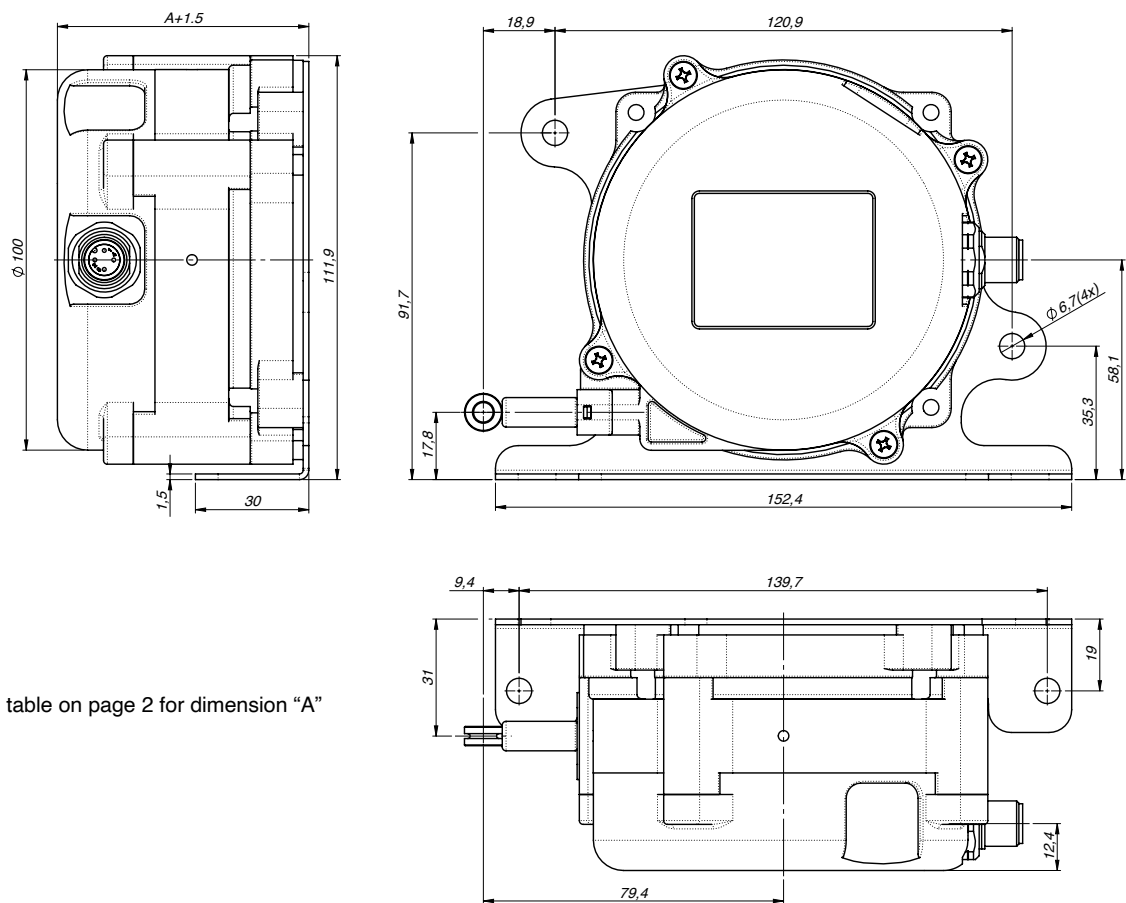FIXING FLANGE MODEL B - FLA034 (optional accessory to order)



“See table on page 2 for dimension “A”

All dimensions are in mm. Decimal separator in drawings is comma.

ORDERING CODE

GSH S M 1 H 1800 S C3 - XXX 0 000 X 00

TRANSDUCER TYPE	
Wire transducer	S

ELECTRICAL CONNECTIONS	
M12 4P connector	M
M12 5P connector (CAN pin 1 FLOATING)*	N
M12 8P connector**	O
M12 5P connector (CAN pin 1 0V)*	P
Cable	F

*Available for digital output only

**Available for analog output only

CONNECTOR OPTIONS	
Cable output	0
1 connector	1
1 Male & 1 Female connectors* or 2 cables**	3

*Only for electrical connections: "N", "P"

**Only for electrical connection: "F"

MEASUREMENT RANGE	
1800 mm	1800
2300 mm	2300
3300 mm	3300
4300 mm	4300
4800 mm	4800
5300 mm	5300
6300 mm	6300
7300 mm	7300
8000 mm	8000
8300 mm	8300

ARCHITECTURE	
Standard	H
PLd/SIL2	S

OUTPUT SIGNAL	
CH1=CH2 : 10...90 % Us	A0
CH1=CH2 : 0.5...4.5 V	A1
CH1=CH2 : 0...10 V *	A2
CH1=CH2 : 4...20 mA	A3
CANopen	C1
CANopen Safety **	C3

*Not available with architecture "S"

**Available only with architecture "S"

Special execution	XXX
-------------------	------------

CABLE LENGTH	
00	No cable
01	100 mm
02	200 mm
05	500 mm
10	1 m
20	2 m
30	3 m
40	4 m
50	5 m
A0	10 m
...	Other lengths on request

ACCESSORIES	
X	No accessories
A	Fixing flange model A (FLA033)
B	Fixing flange model B (FLA034)
C	4-pin female mating connector M12x1; IP67-rated (CON293)
D	8-pin female mating connector M12x1; IP67-rated (CON469)
E	5-pin female mating connector M12x1; IP67-rated (CON031)
F	Protective cap kit for M12x1 female connector (PKIT811)
G	Protective cap kit for M12x1 male connector (PKIT812)
H	4-pin female connector, 90°, M12x1; IP67-rated (CON050)
I	5-pin female connector, 90°, M12x1; IP67-rated (CON041)

000	Special configuration
------------	-----------------------

LINEARITY REPORT	
0	Individual linearity report not included
L	Individual linearity report included

EXAMPLE OF DESCRIPTION:

GSH S M 1 H 8300 S A3 0 000 X 00

GSH - S - M12 4P connector - 1 connector - stroke 8300 mm - PLd/SIL2 certified architecture - 4...20 mA output - individual linearity report not included - no special execution - no accessories

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice.

GEFRAN spa
via Sebina, 74
25050 PROVAGLIO D'ISEO (BS) - ITALIA
tel. 0309888.1 - fax. 0309839063
Internet: <http://www.gefran.com>

GEFRAN

DTS_GSH-S_1800-8300_03-2026_ENG