

Metal Case Draw Wire Potentiometer







- Measuring strokes 1500 ... 3300 mm
- 5 kOhm / 10 kOhm resistive type or
0-10 V, 4-20 mA, 0-20 mA internal electronic circuit
- Easy mounting



Technical Specifications

Type of measurement	Resistive
Linearity	0,5%
Measurement stroke	1500 ... 3300 mm
Output signal type	Voltage divider
Output type	Resistive output, 0 - 10 V, 0 - 20 mA or 4 - 20 mA
Supply voltage	24 VDC max., 15 - 30 V [voltage / current output]
Electrical connections	2,5m cable (standard)
Max. speed	2 m/s
Case material	Aluminium
Weight	< 1300 gr.
IP degree	IP 65
Operating temperature	-20°C ... +80°C
Storage temperature	-30°C ... +90°C

Mechanical Specifications

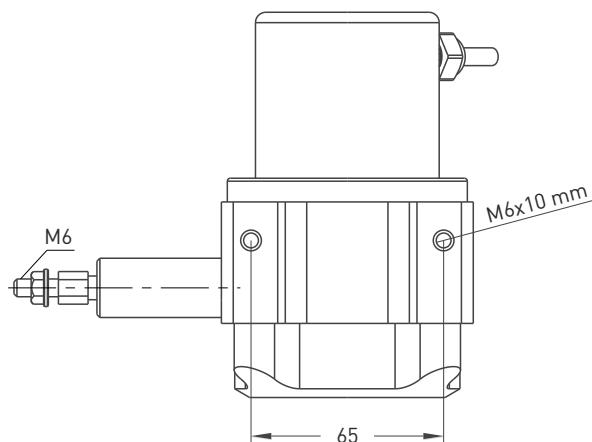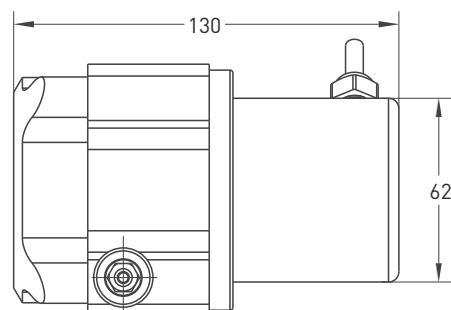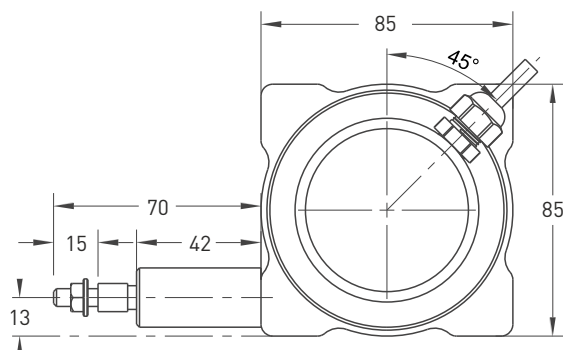

Model	Case type	Measurement stroke	Linearity	Output	Connector / Cable	Cable output
DWPM	2	2000	D	5K	2M5	R
DWPM	2	500 mm 1500 mm 2000 mm 2500 mm 3300 mm	D: 0,5%	5K: 5 Ω 10K: 10 Ω V10: 0 - 10 V I 4 : 4 - 20 mA I 20: 0 - 20 mA	2M5: 2,5 meter cable 5M : 5 meter cable 8M : 8 meter cable 10M: 10 meter cable	R: Radial